




KVP[®] Straight 1-3/4" Pitch Belting CC42 (Constant Cleaning Vented Top)



Your Source For Habasit
Belting And Chain
www.StilesEnterprises.com • 1-800-325-4232

Description

- 1-3/4 inch pitch
- 20% open area
- Food approved materials
- Connecting rod diameter = 0.250 inch (6.4 mm)
- Standard belt width increments = 1 inch (25.4 mm) nominal, starting from 4 inches (101.6 mm)
- Material selection may affect belt width — please contact your local partner for actual dimensions

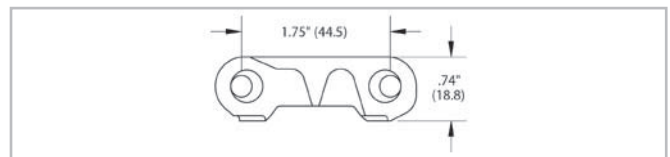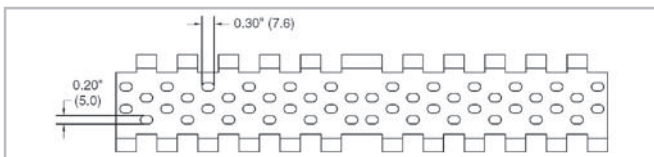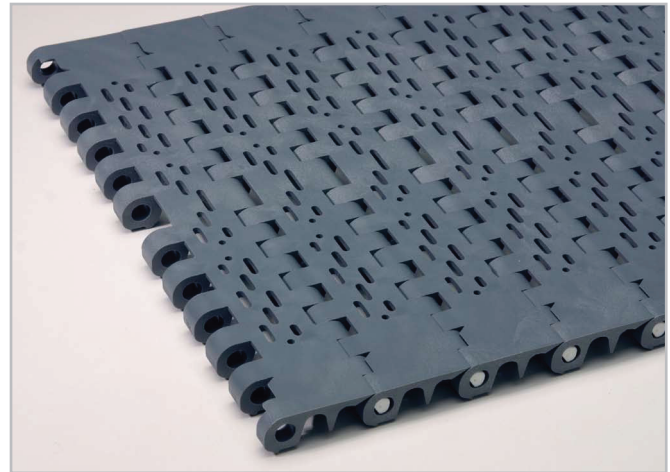


Belt data

Belt material		PP	PE
Rod material		Nylon (PA)	
Nominal tensile strength F' _N	N/m lb/ft	35024 2400	23349 1600
Temperature range	°C °F	5 - 105 40 - 220	-40 - 65 -40 - 150
Belt weight m _B	kg/m ² lb/sqft	7.0 1.44	7.3 1.49
Standard belt color		gray/white	white

Additional belt colors and materials available, stainless steel rods available - contact your local partner.

Belt accessories

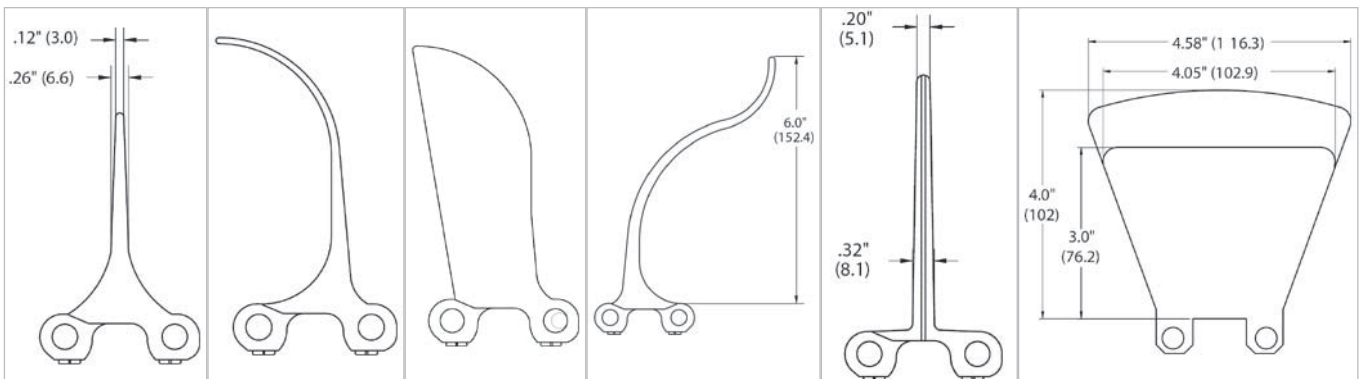

Standard flight
Standard flights are available in 1", 2", and 3" heights. Standard flight indent is 1" or greater from outside edge of belt with all flights.

Scoop flight
Scoop flights are available in 3", 4" and 6" heights.

Bucket flight
Bucket flights are available in 3", 4" and 6" heights.

Slide flight

Tongue & Groove flight
Tongue & Groove flights are available in 4" height. Standard flight indent is 2" or greater from outside edge of belt.

Sideplates
Sideplates are available in 3" and 4" heights.